© 2018

**visionary™ DESIGNS**

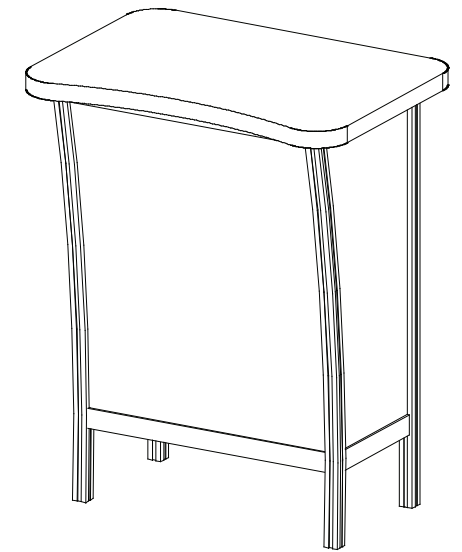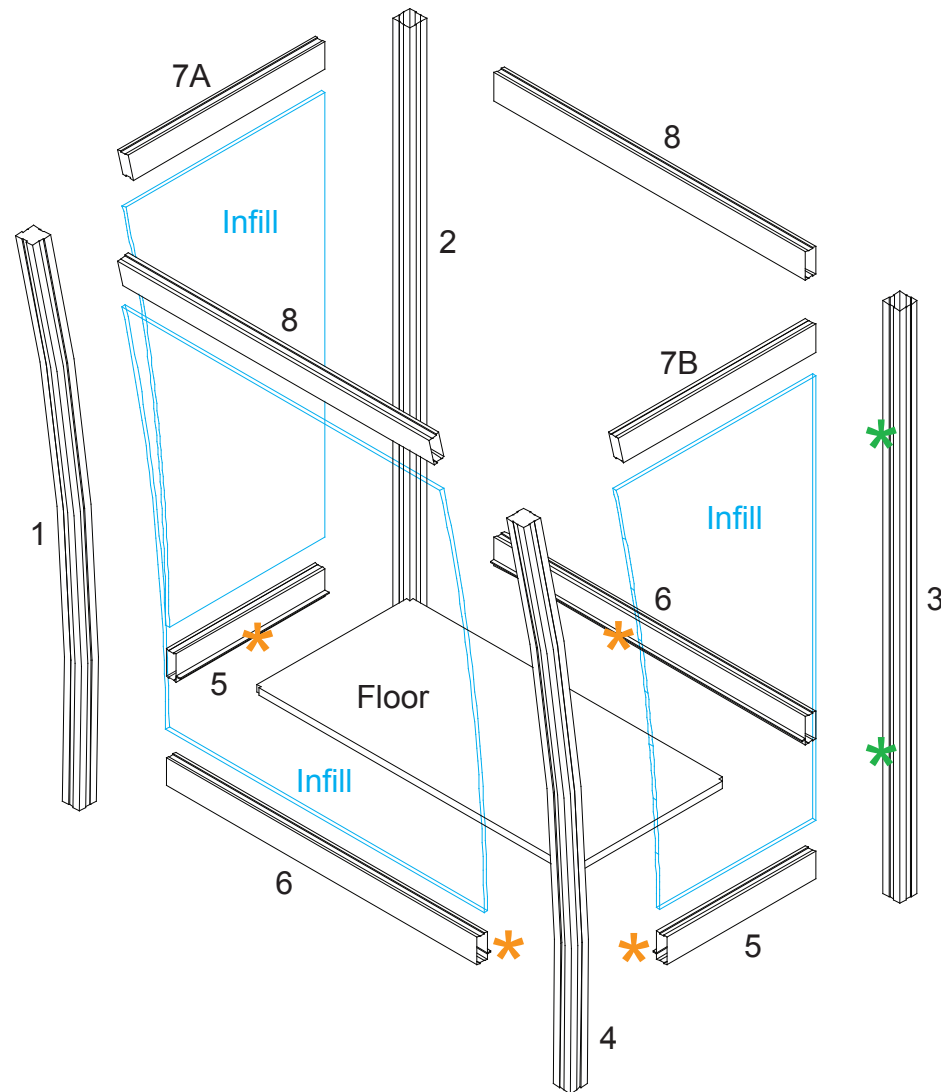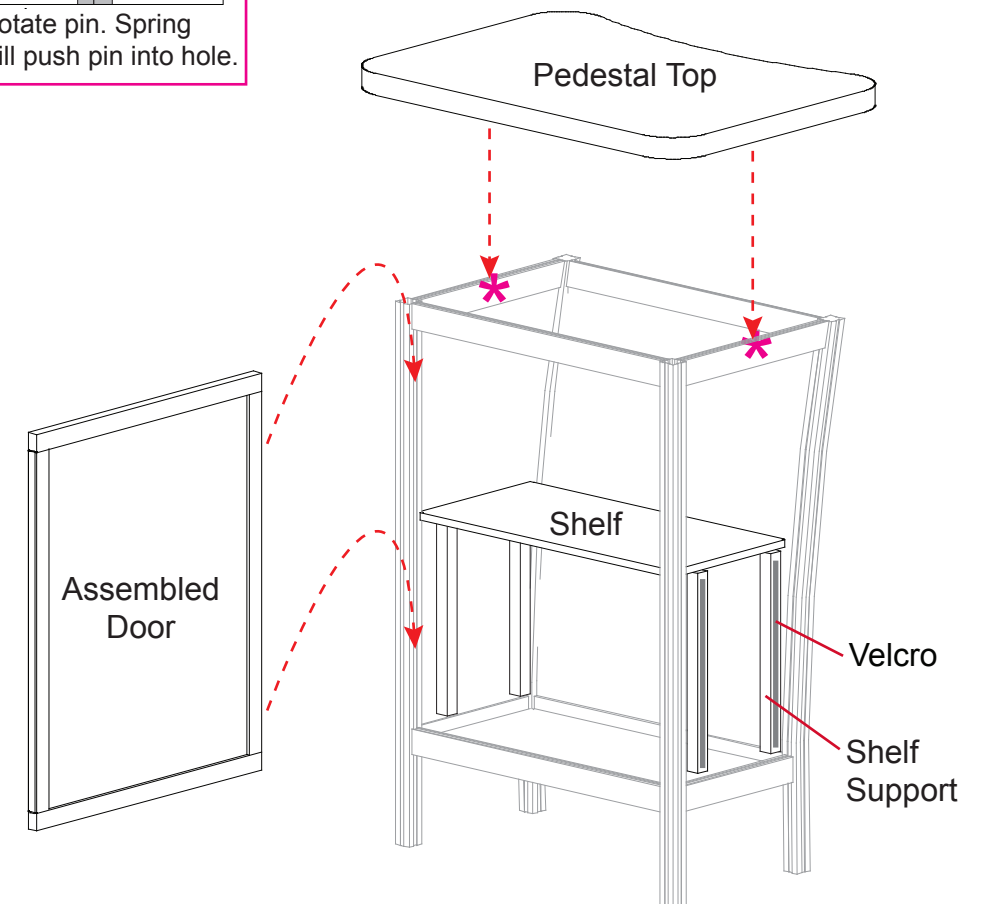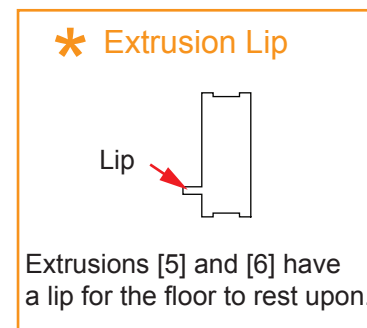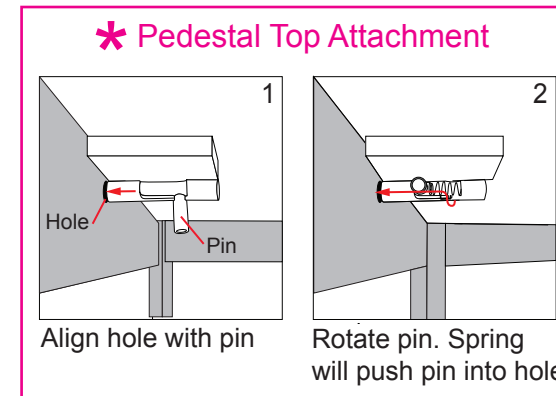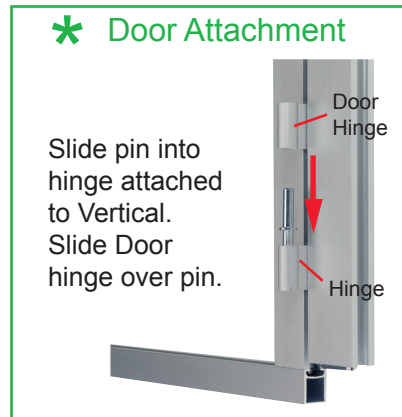| Item | Qty. | Description |
|------|------|-------------|
| 1 | 1 | 40.232" S40 Curved Vertical Extrusion |
| 2 | 1 | 38" S40 Vertical Extrusion w/ Stoppers |
| 3 | 1 | 38" S40 Vertical Extrusion w/ Hinges |
| 4 | 1 | 40.232" S40 Curved Vertical Extrusion |
| 5 | 2 | 11" Z45 Horizontal Extrusion w/ Lip |
| 6 | 2 | 23" Z45 Horizontal Extrusion w/ Lip |
| 7A,7B | 1,1 | 14.567" Z45 Horizontal Extrusion |
| 8 | 2 | 23" Z45 Horizontal Extrusion |

Setups:
1) Connect verticals [1] [2] [3] and [4] with horizontals [5] and [6].
2) Insert infills between [1 and 2] [1 and 4] [3 and 4] then secure with horizontals [7A] [7B] and [8].
3) Attach door to vertical [3]. See Door Attachment detail.
4) Place floor on lip of horizontals [5] and [6]. See Extrusion Lip detail.
5) Attach Velcro on shelf supports to infills, inside assembled pedestal base.
6) Place shelf on shelf supports.
7) Attach pedestal top to horizontals [7A] and [7B]. See Pedestal Top Attachment detail.

Completed Assembly

**＊ Door Attachment**

Slide pin into hinge attached to Vertical. Slide Door hinge over pin.

Door Hinge

Hinge

**＊ Pedestal Top Attachment**

1  Hole  Pin

Align hole with pin

2

Rotate pin. Spring will push pin into hole.

**＊ Extrusion Lip**

Lip

Extrusions [5] and [6] have a lip for the floor to rest upon.

7A

Infill

8

2

8

7B

Infill

1

5

Floor

Infill

6

6

5

3

4

Pedestal Base Assembly

Pedestal Top

Assembled Door

Shelf

Velcro

Shelf Support

**www.classicexhibits.com**

**＠ SETUP INSTRUCTIONS**

If you would like to tell us about your experience with your setup instructions please email us at **info@classicexhibits.com**

© 2018
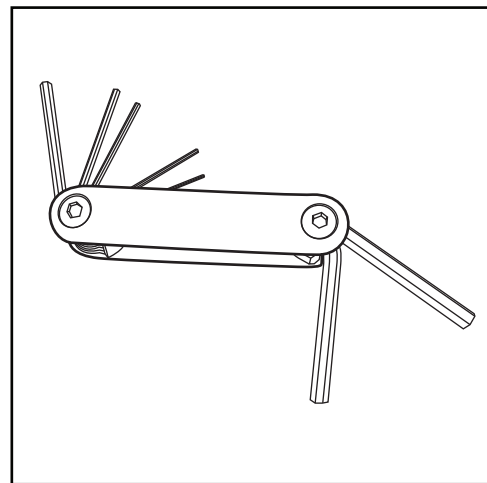
## General Setup Instructions

- Read entire setup instruction manual prior to unpacking parts and pieces.

- The setup instructions are created specifically for this configuration.

- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.
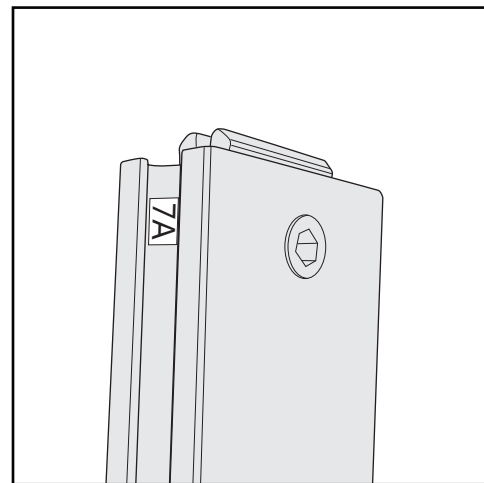
## Cleaning & Packing

- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.

- Keep exhibit components away from heat and prolonged sun exposure. **Heat and UV exposure will warp and fade components.**

- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.
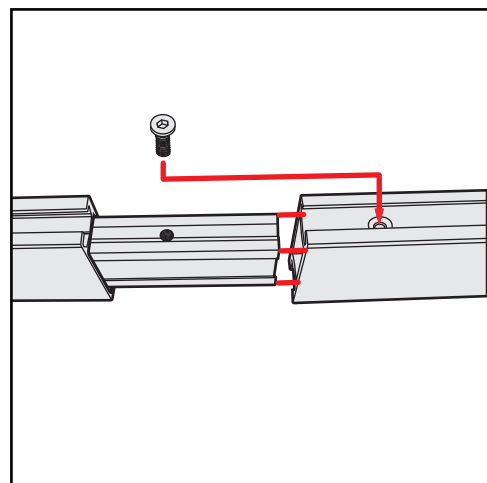
## Disassembly

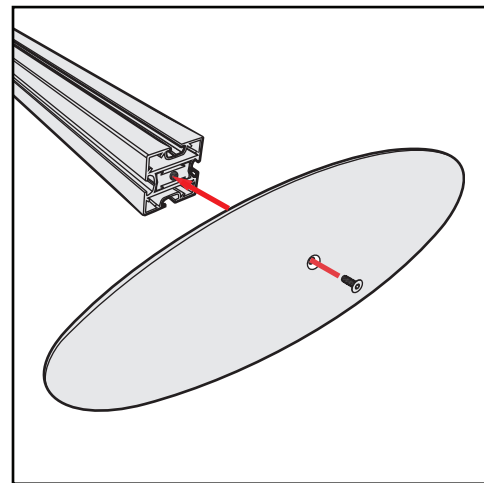- For loss prevention, tighten all setscrews and locks during disassembly
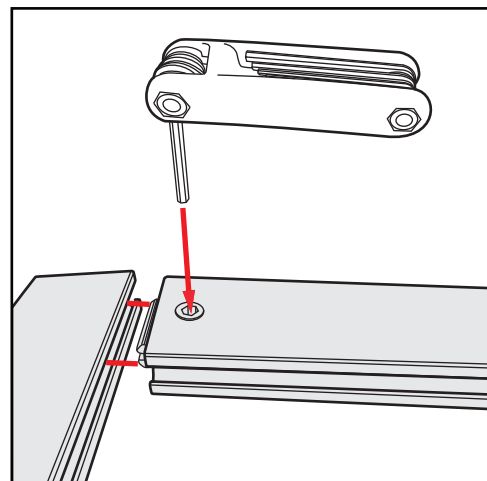
Hex Tool - Essential for Assembly
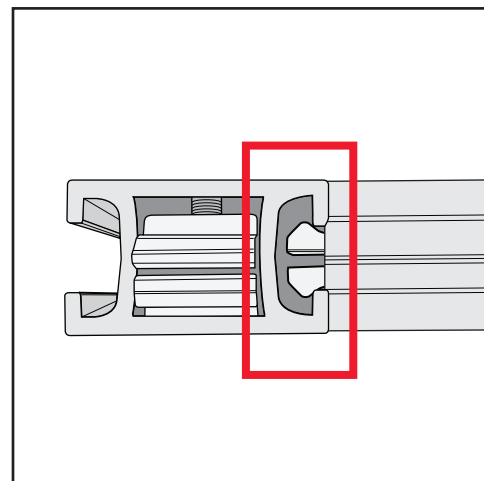
Part Identification - Numbering

Spline Connection

Base Plate & Extrusion Connection

Extrusion & Lock Connection

Engaged Lock

## WARNING

DO NOT USE POWER TOOLS

LADDERS OR LIFTS MAY BE REQUIRED

ALL CONNECTIONS MUST BE TIGHTLY SECURED

**visionary** ™
**DESIGNS**